

# MAUS Stixx Pro 10

## Art no 1370-1



MAUS Stixx PRO 10 is a fire suppression unit that automatically extinguishes fires in larger spaces in the event of a fire. With a capacity to protect spaces up to 1 m<sup>3</sup>, the MAUS Stixx PRO 10 is 2 x more powerful than MAUS Stixx PRO 5 and 10 x more powerful than MAUS Stixx PRO (which can only protect 0.1 m<sup>3</sup>). The size is the same as the MAUS Stixx PRO 5, but with twice the power. The small size, but with its large capacity makes the product a unique fire protection product on the market. The product can also be equipped with a detector cable which means that you have a larger detection area and faster detection in larger power stations and switchgears.

The built in heat detecting cables are placed on the top of the unit and activates the unit by exposure to fire or when the unit reaches 180°C. The extinguishing agent is sent out through the ports of the unit and quickly fills the enclosure and extinguishes the fire. You can also add additional heat detecting cables for a larger detection area and you can also create chain connections with more units to protect an even larger space. The extinguishing agent consists of a non-toxic, environmentally friendly, patented potassium mixture that absorbs the heat and interrupts the chemical composition of the fire. A true innovation in firefighting.

### Advantages:


- Non-pressurized product.
- 100% activation on detection.
- Activates at low temperature.
- Small size.
- Requires no maintenance.
- No damages\*

*\*Potassium radicals are very active and they interrupt the chemical combustion reactions by neutralizing hydrogen, oxygen and hydroxide radicals in the flame.*

### SPECIFICATIONS:

MAUS Pro Stixx 10	Automatic Fire Suppression Unit
Article no:	1370-1
EAN/Barcode:	7350015530256
Dimensions:	6 x 6 x 2 cm
Weight:	200 g
Warranty	5 years (6 years shelf life)
Exhaust time:	≤5s
Protected space:	1 m <sup>3</sup> (H200 x B100 x D50 cm)
Activation Temperature:	170°C±10°C
Operating Temperature:	-30°C - 70°C
Certifications:	CE 2829
Units per box:	1

CE 2829

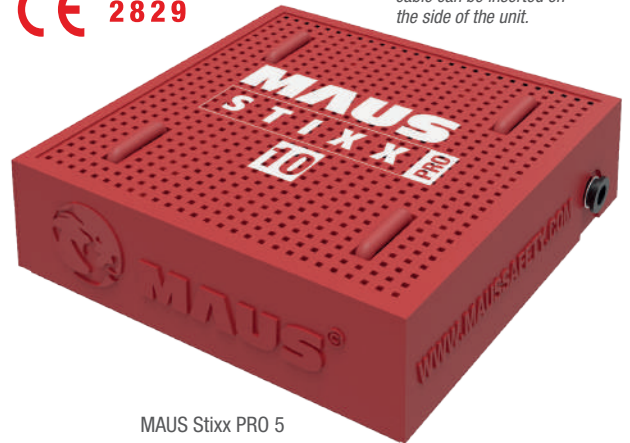

MAUS Stixx PRO 5

An additional heat detecting cable can be inserted on the side of the unit.



MAUS Stixx PRO 10 product box.

### Important!

The MAUS Stixx Pro 10 needs 3 cm of space at the ports to be able to send out the extinguishing agent correctly. The unit is designed for closed enclosures. Ventilated spaces are not ideal for this technique.

### Where to install MAUS Stixx PRO 10:

- Electrical enclosures (standard cabinets, appliance cabinets, etc.)
- Switchgears
- Server rooms
- Engine compartments
- Motorhomes / RV's

MAUS™ is a registered trademark owned by Falkenheim Invest AB. Since 2015 MAUS have equipped the Swedish Police, the government owned postal service PostNord, Sandvik, Anticimex, corporate cars from Audi, VW, Volvo and Skoda with their products and innovative technology. Falkenheim Invest AB headquarter is based in Lidköping, Sweden.